


**Removal**

---


- 1 Detach and remove liner.




- 2 Remove screw in recess.

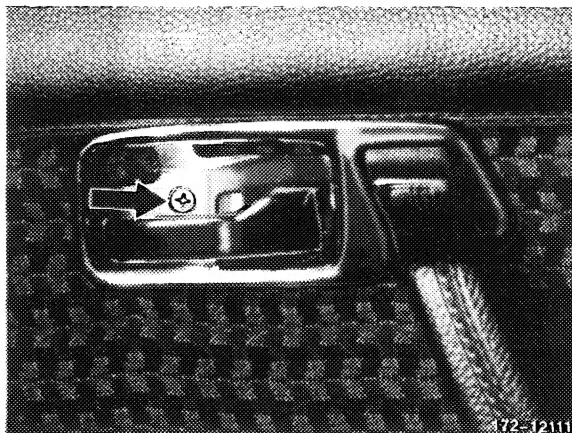

- 3 Remove top grip screw.

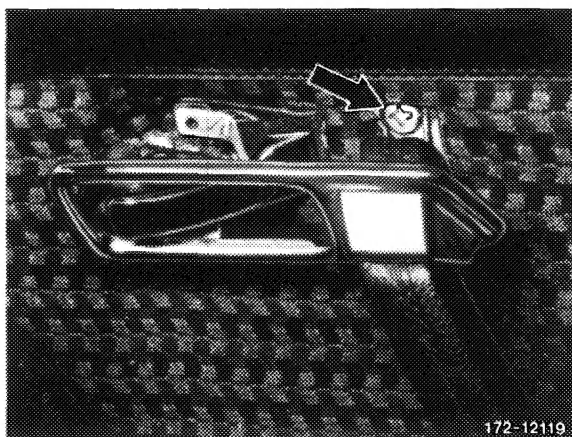

- 4 Unscrew both arm rest screws and take arm rest off of door liner.

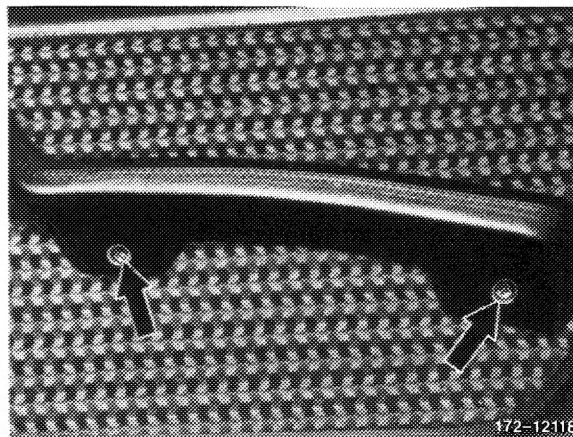

## Installation

---

- 5 Install in reverse sequence.